Wifi Viewer Setup

Step 1

Step 2

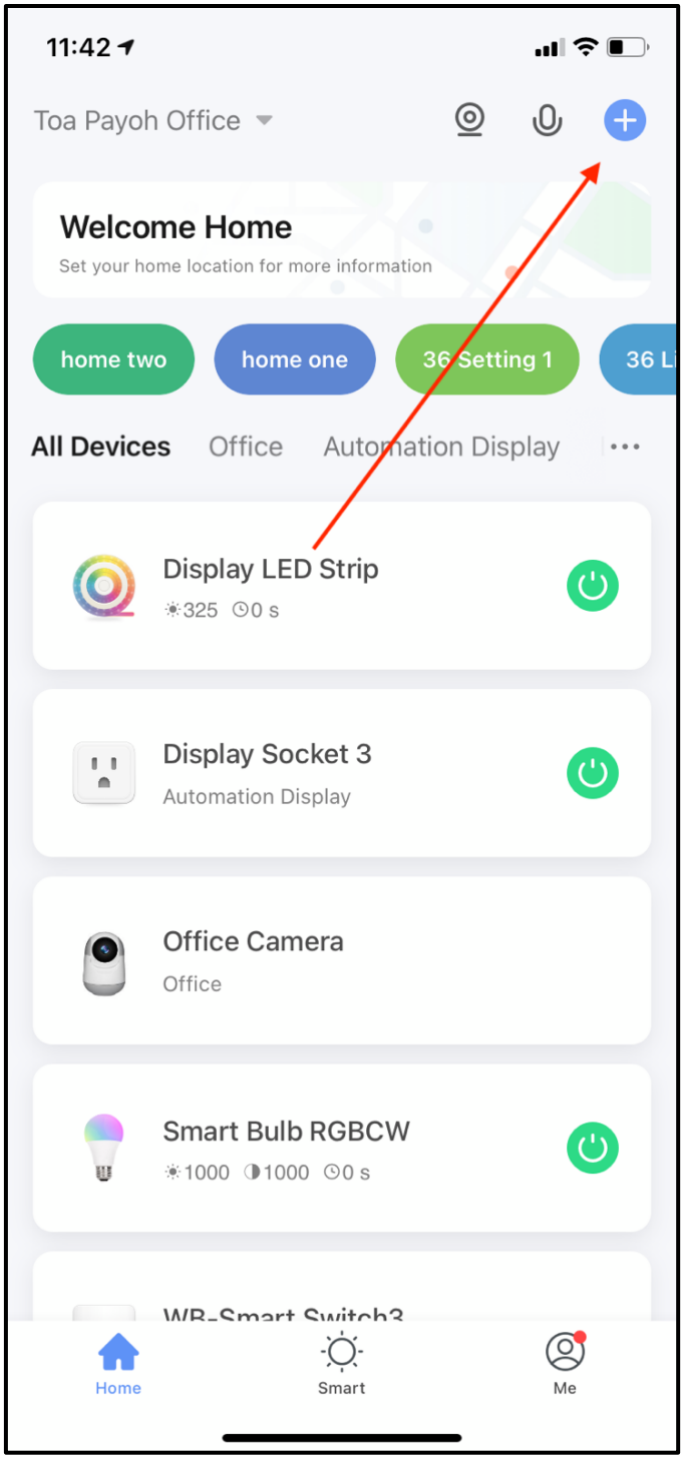

Step 3

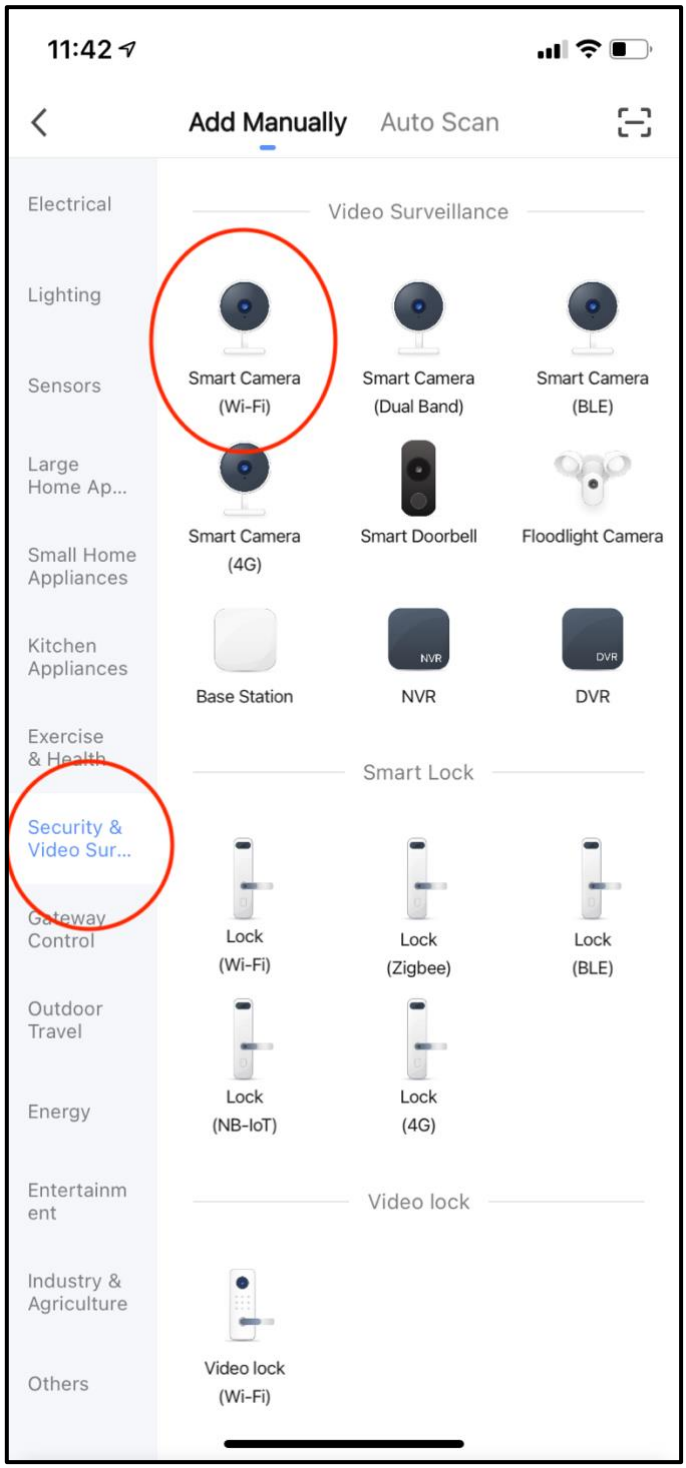
11:42
Add Manually
Auto Scan
Electrical
Lighting
Sensors
Large Home Ap...
Small Home Appliances
Kitchen Appliances
Exercise & Health
Security & Video Sur...
Gateway Control
Outdoor Travel
Energy
Entertainment
Industry & Agriculture
Others
Video Surveillance
Smart Camera (Wi-Fi)
Smart Camera (Dual Band)
Smart Camera (BLE)
Smart Camera (4G)
Smart Doorbell
Floodlight Camera
Base Station
NVR
DVR
Smart Lock
Lock (Wi-Fi)
Lock (Zigbee)
Lock (BLE)
Lock (NB-IoT)
Lock (4G)
Video lock
Video lock (Wi-Fi)

Step 4

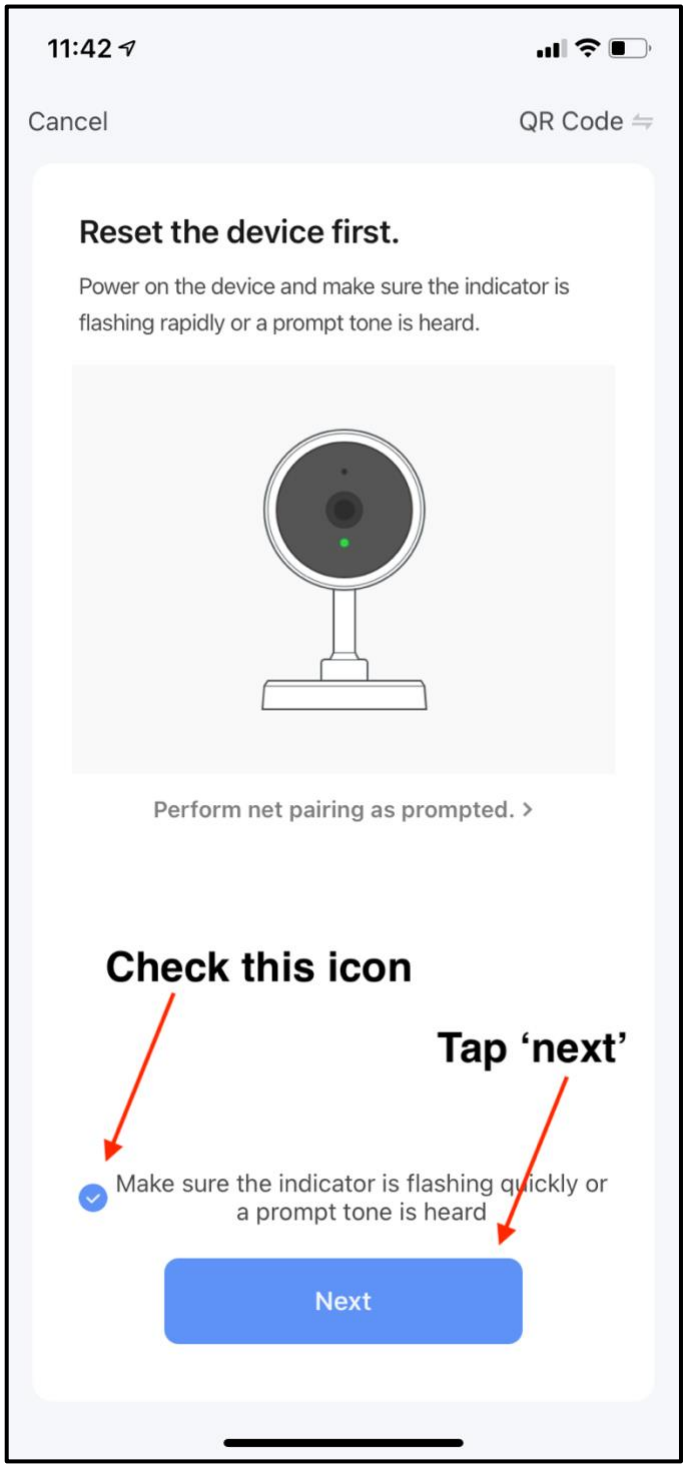
11:42
Cancel
QR Code
Reset the device first.
Power on the device and make sure the indicator is flashing rapidly or a prompt tone is heard.
Perform net pairing as prompted. >
Check this icon
Tap 'next'
Make sure the indicator is flashing quickly or a prompt tone is heard
Next

Step 5

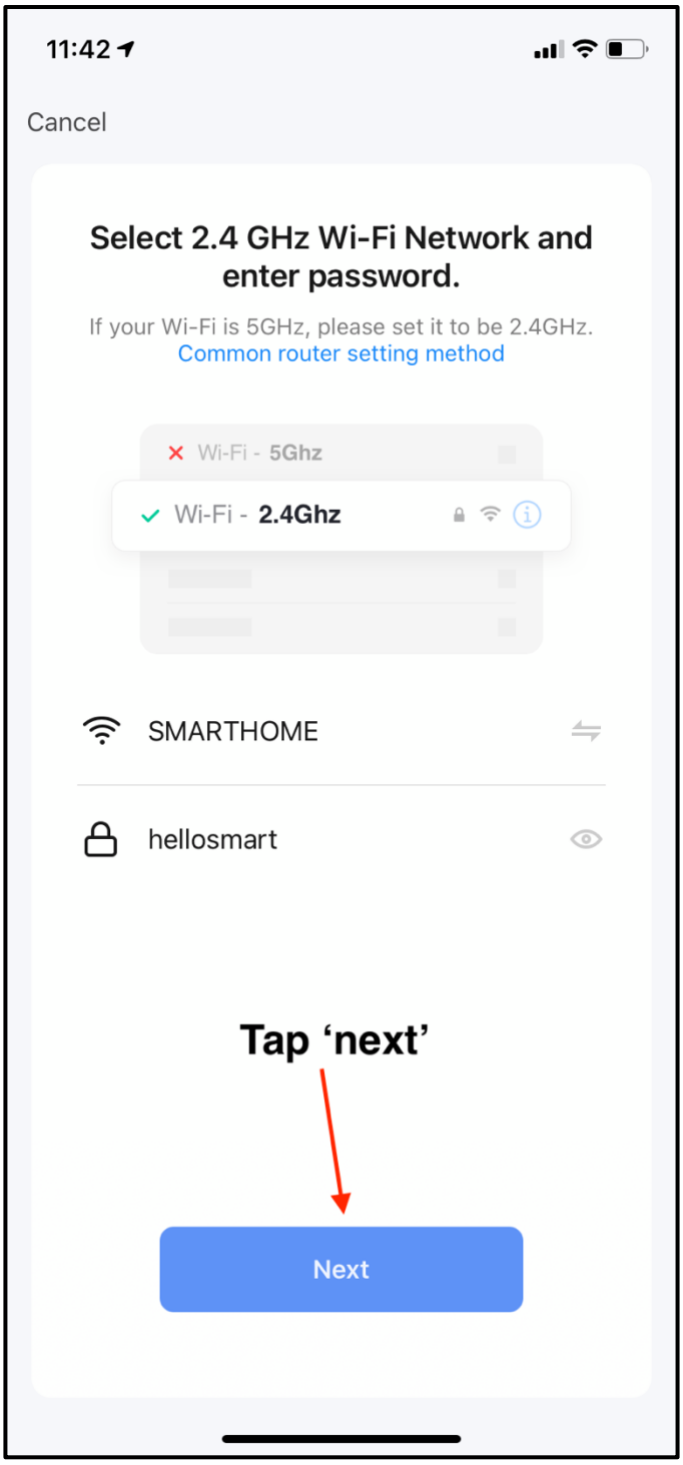

Step 6

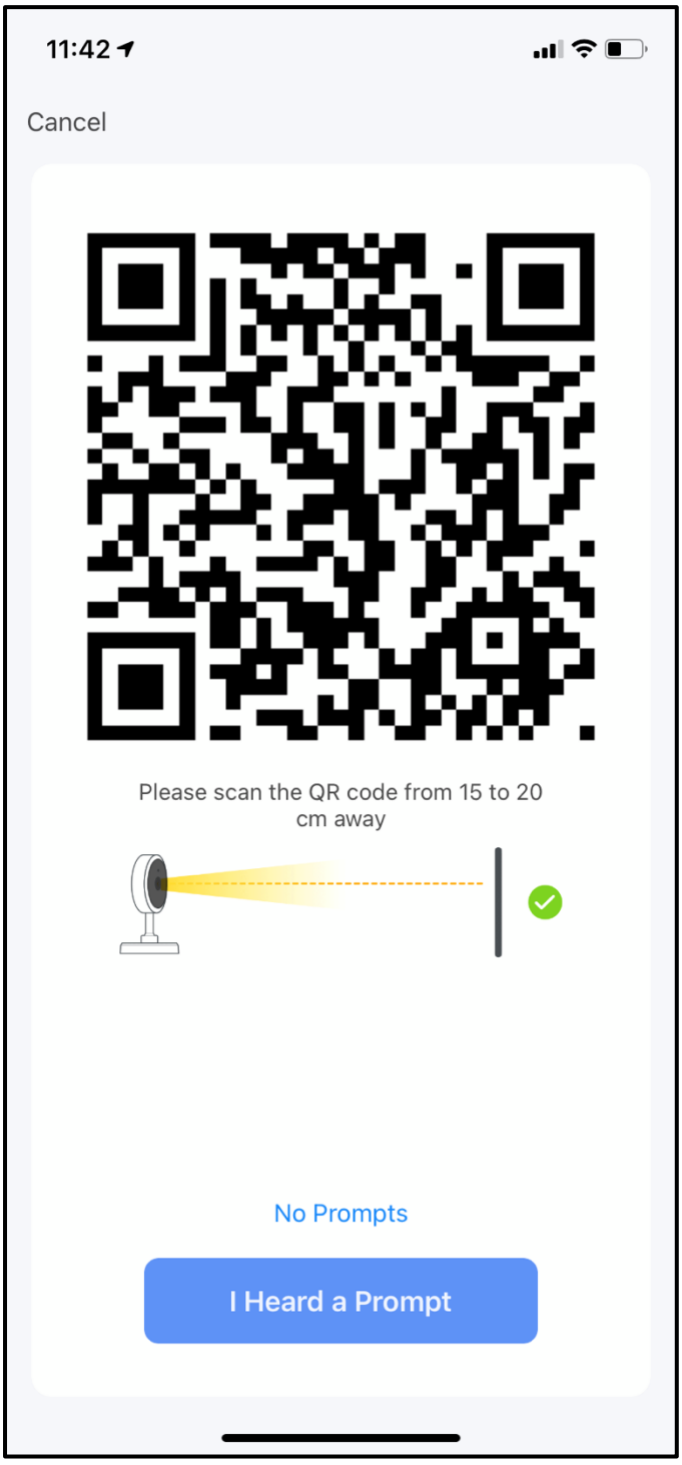

QR code is generated
Follow Step 7 & 8

Step 7

Place QR code in front of viewer camera.

Distance around 15cm away.

Step 8

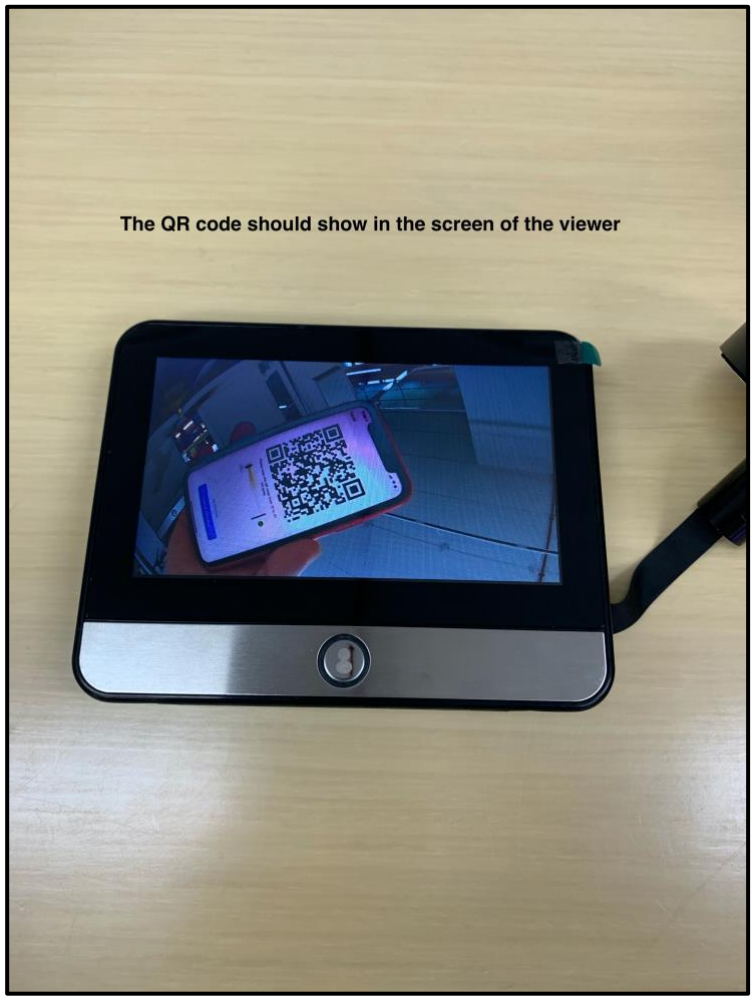

The QR code should show in the screen of the viewer.

Step 9

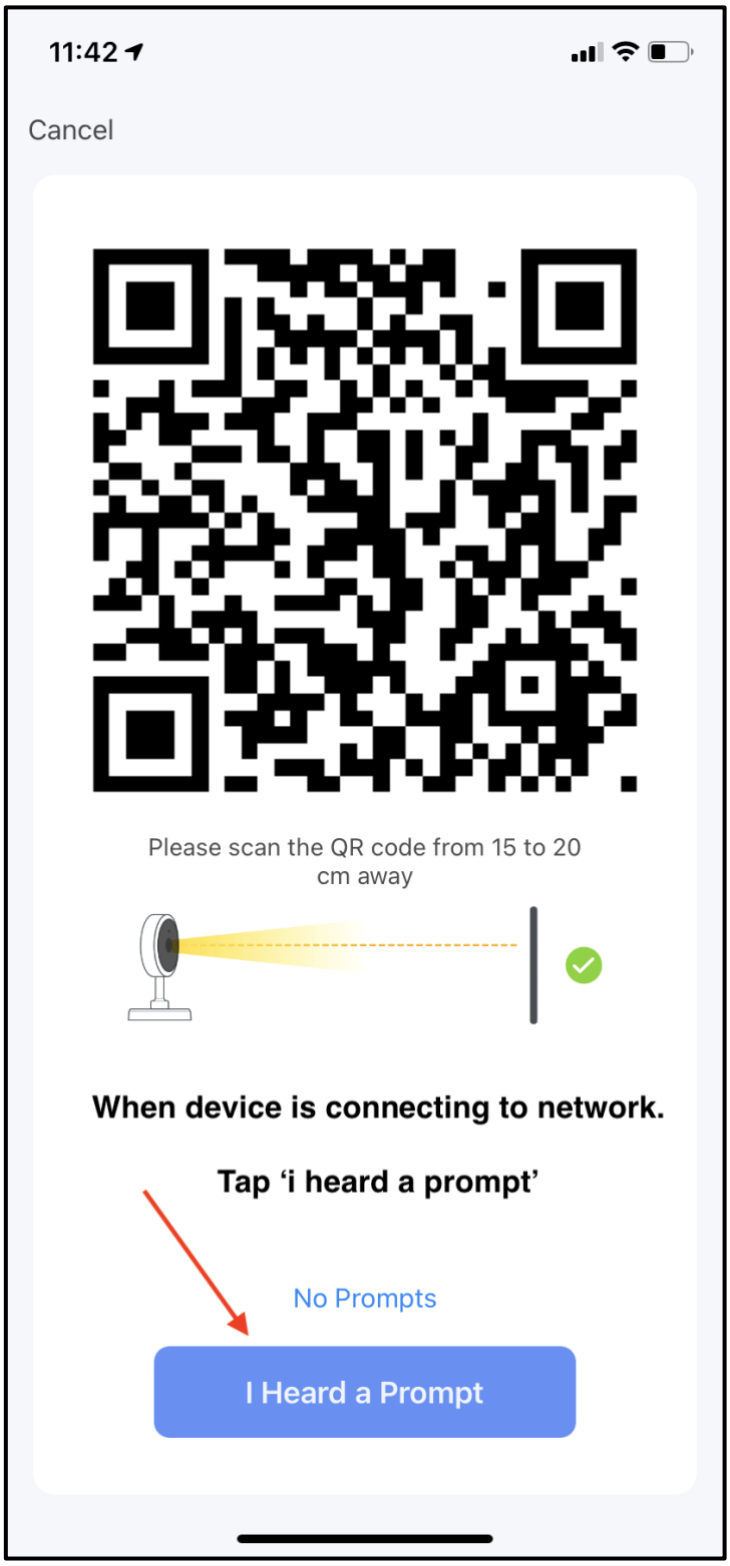

When device is connecting to network.

Tap ‘I heard a prompt’

Wait for device to connect successfully

**If unable to connect, please repeat from step 1 again.