

# Smart Intercom Wi-Fi Setup

## Step 1




Turn on power.

Blue light flashing.

Item is in pairing mode.

Continue to step 3.

## Step 2

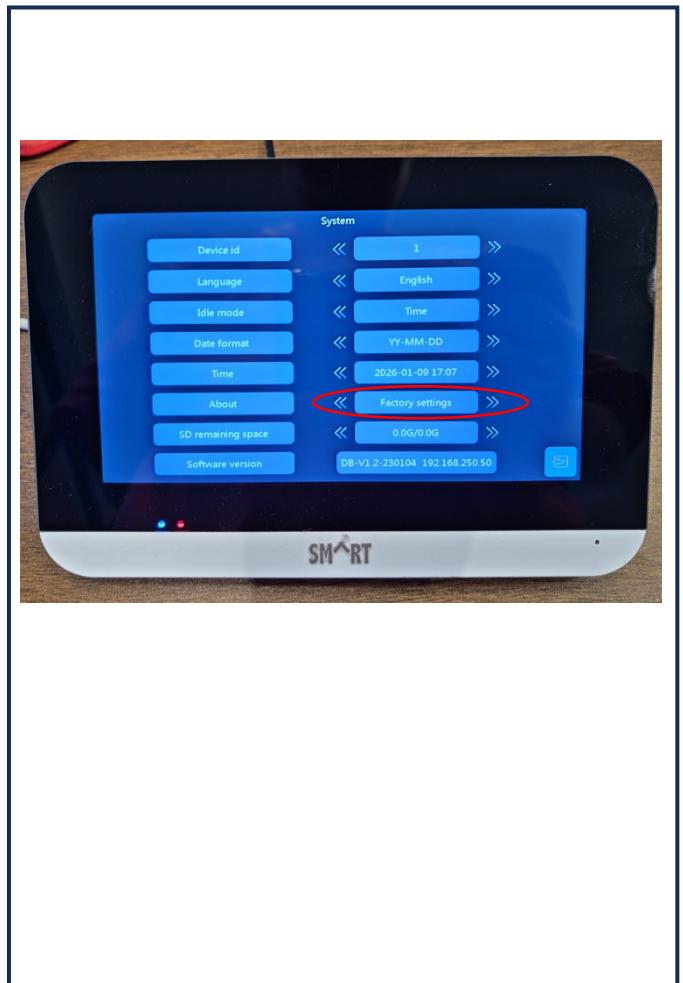

If blue light is not flashing.


Go to “settings” > “system” > tap on “factory settings”

Reset the system. Blue light will start flashing again.


# Checking The Machine



Tap on Settings

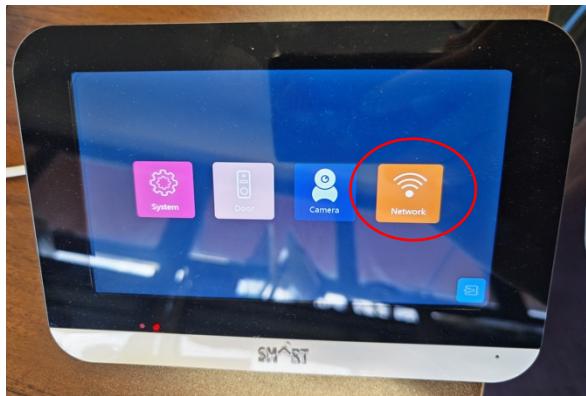


Tap on Network

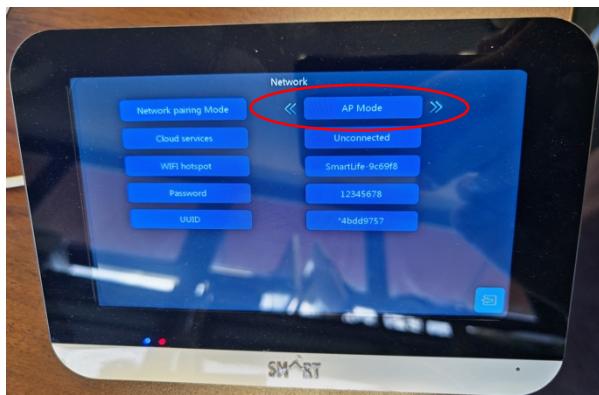


Check to see that

Network Pairing Mode = AP Mode

## Step 3

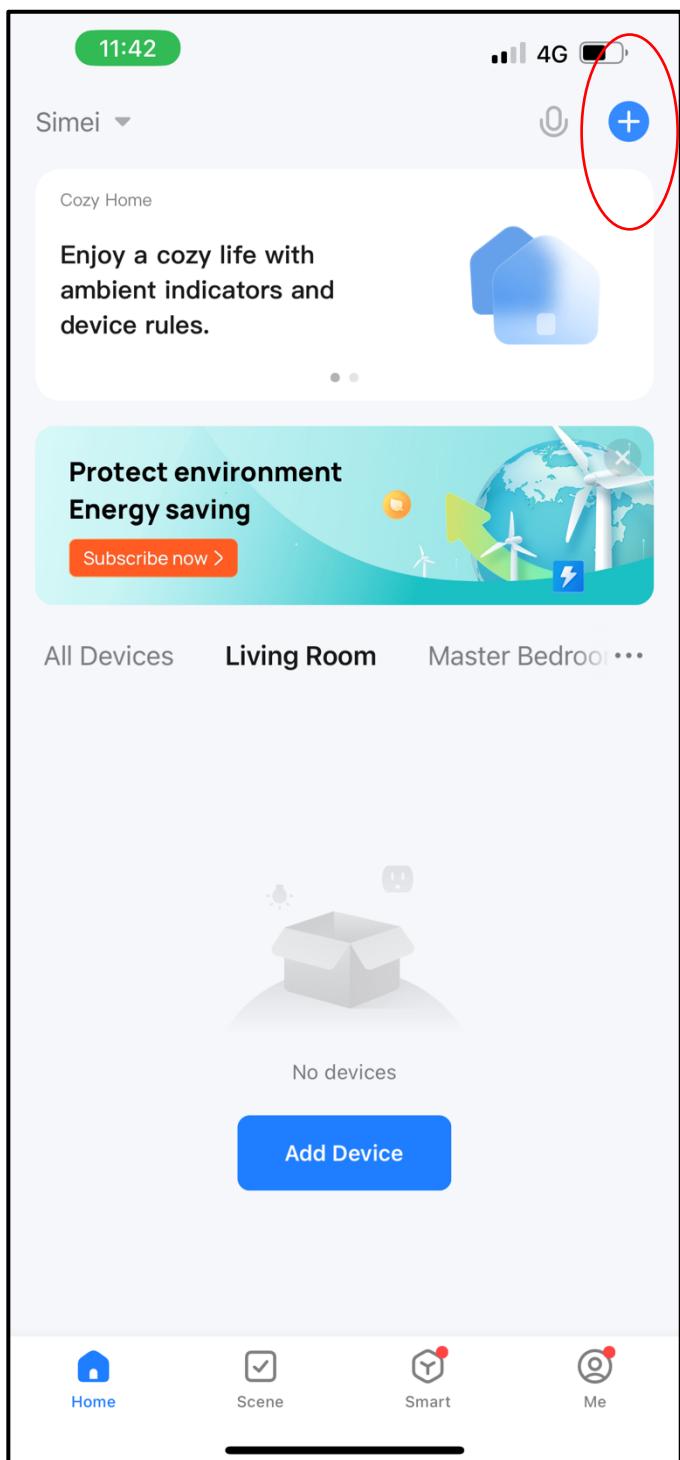


## Step 4

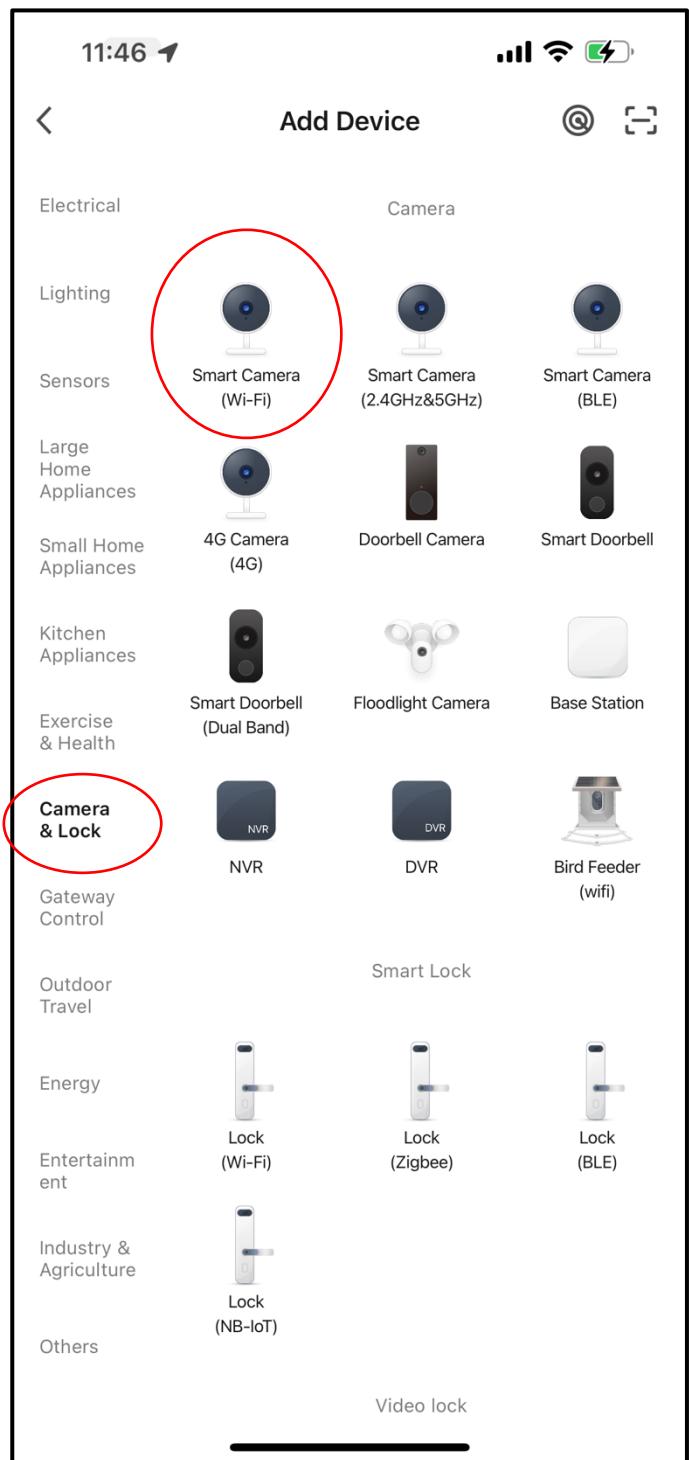

Tap the top right + to add device.

Select the correct device.


## Step 5

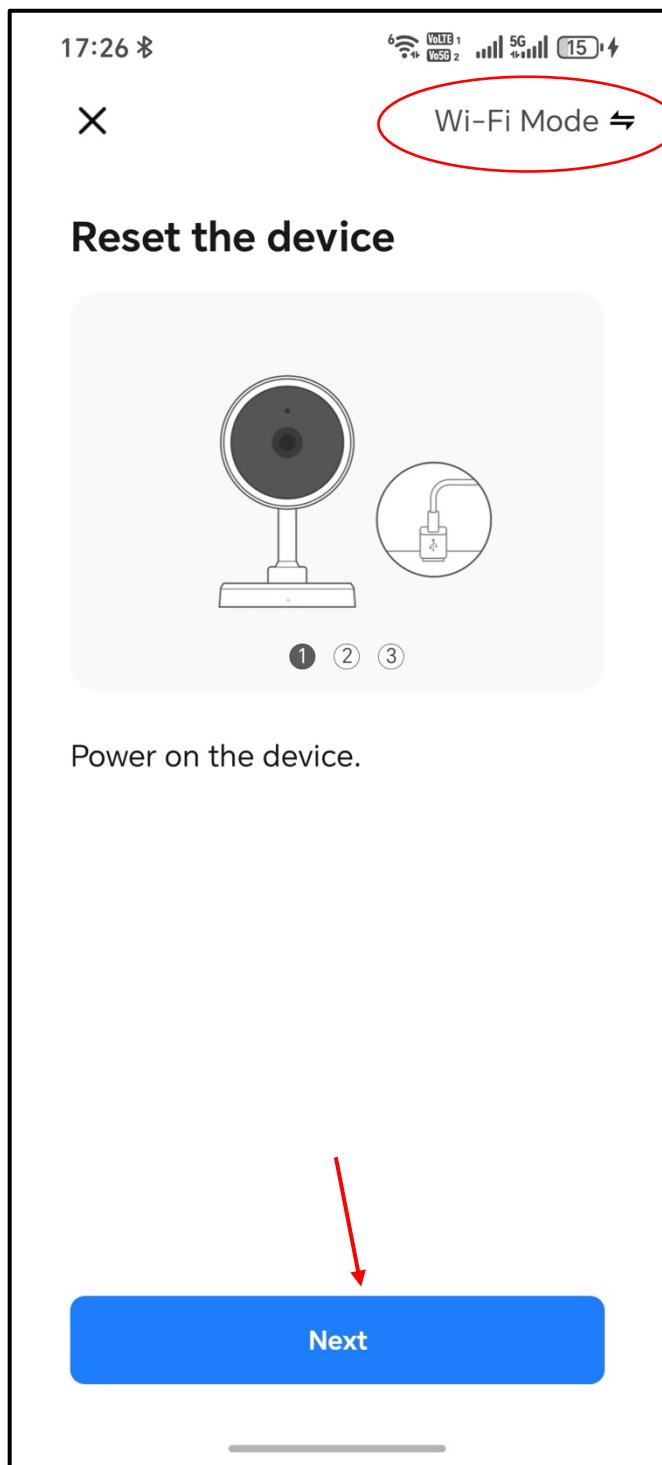

Select Wi-Fi Mode


Click “Next” to continue

## Step 6

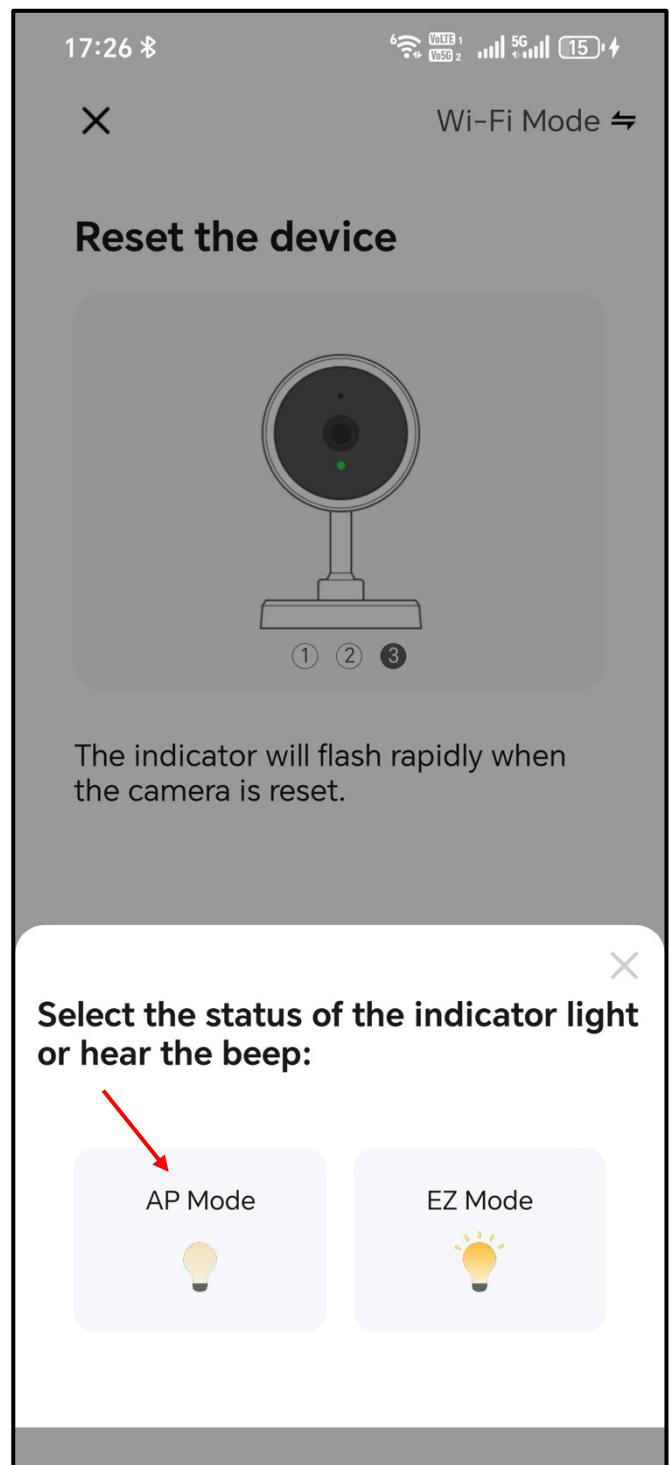

Choose AP Mode


## Step 7

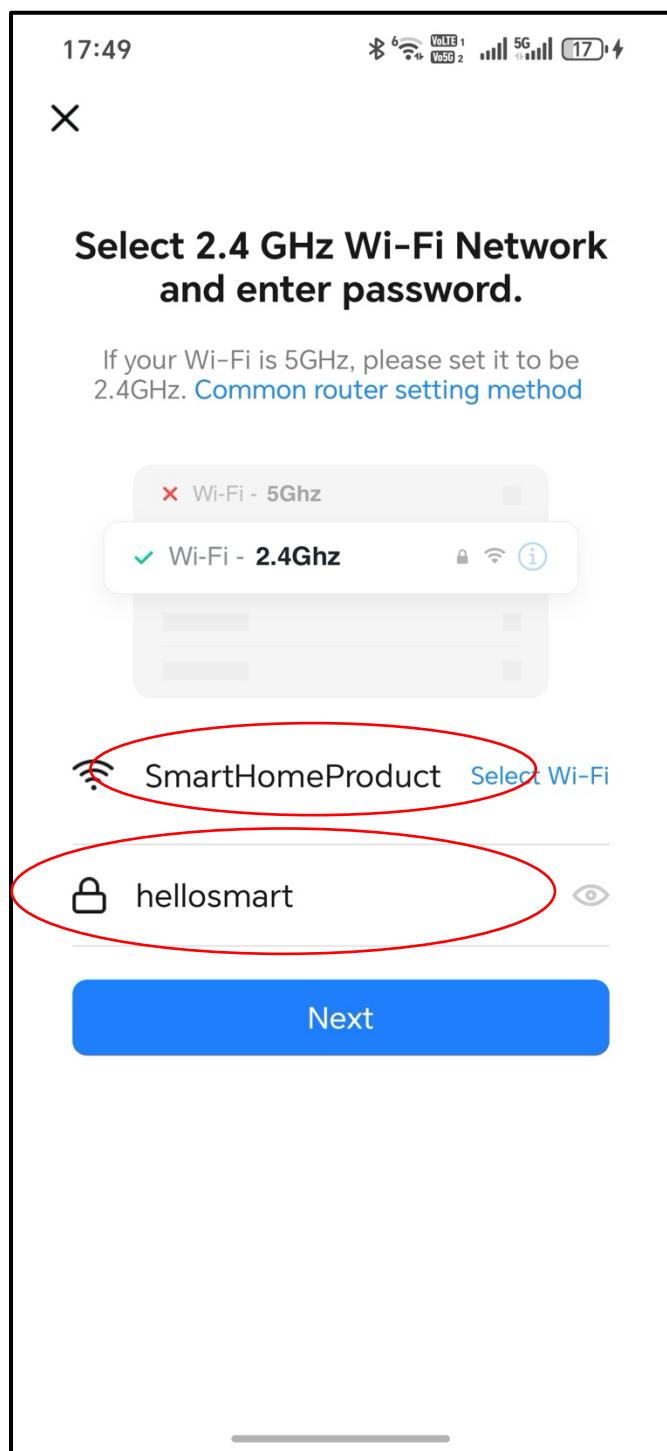

Select your Wi-Fi 2.4G network.

Key in correct password.

## Step 8

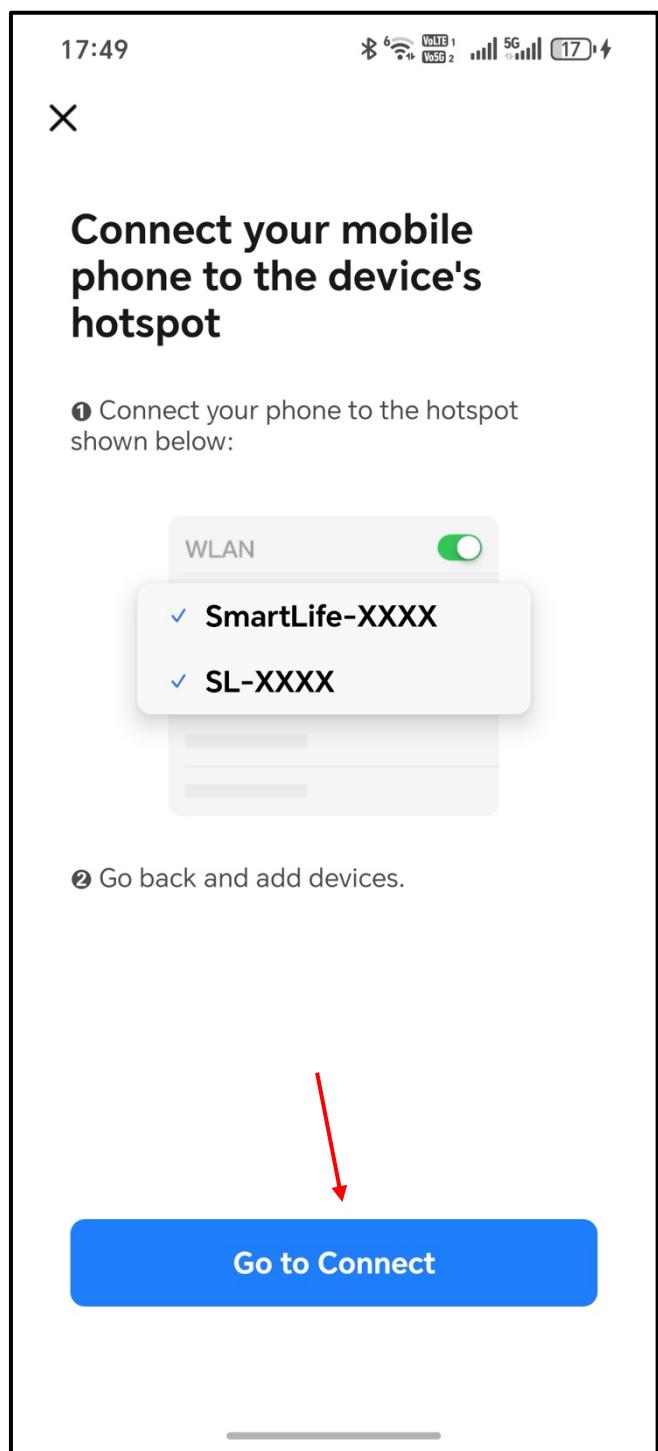


Click on “Connect”.

Select item hotspot.  
SmartLife-XXXX

Key in password 12345678


Return back to Smart Life app

## Step 9

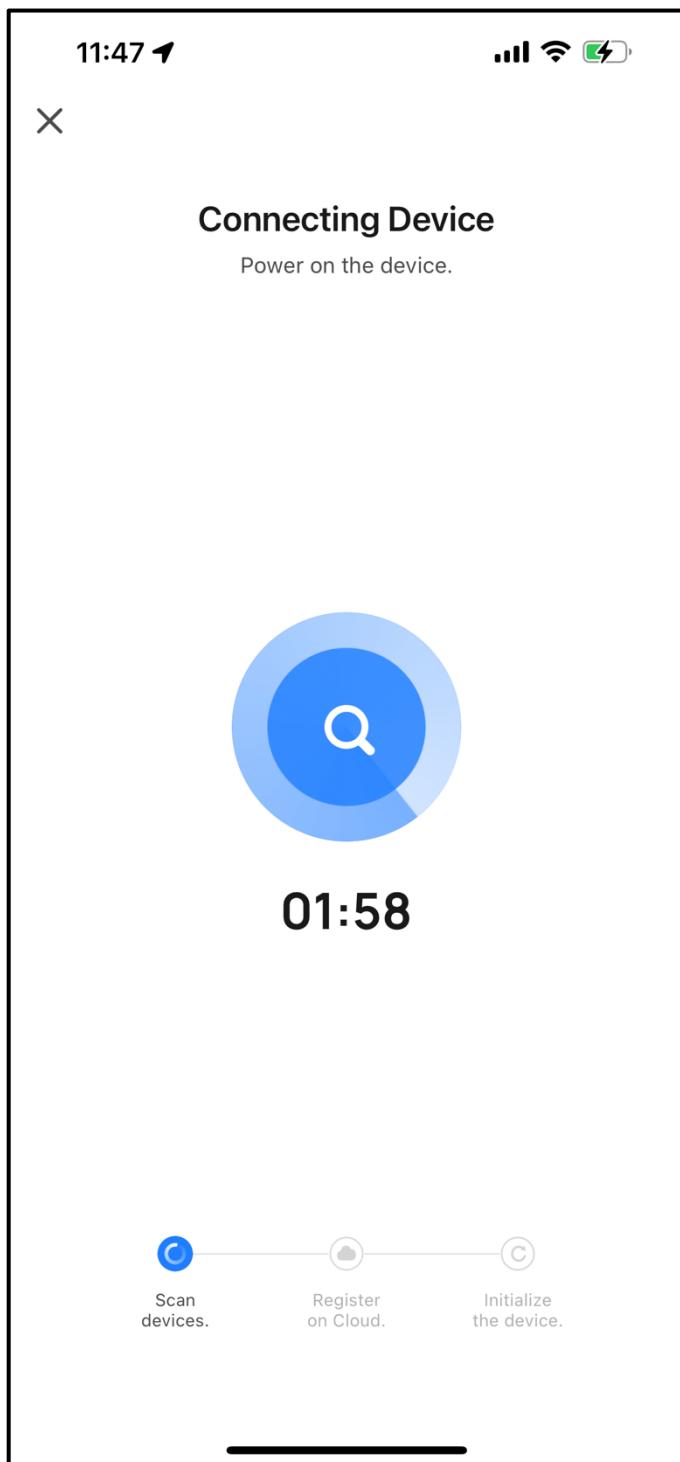

The item pairing process will begin.

## Step 10

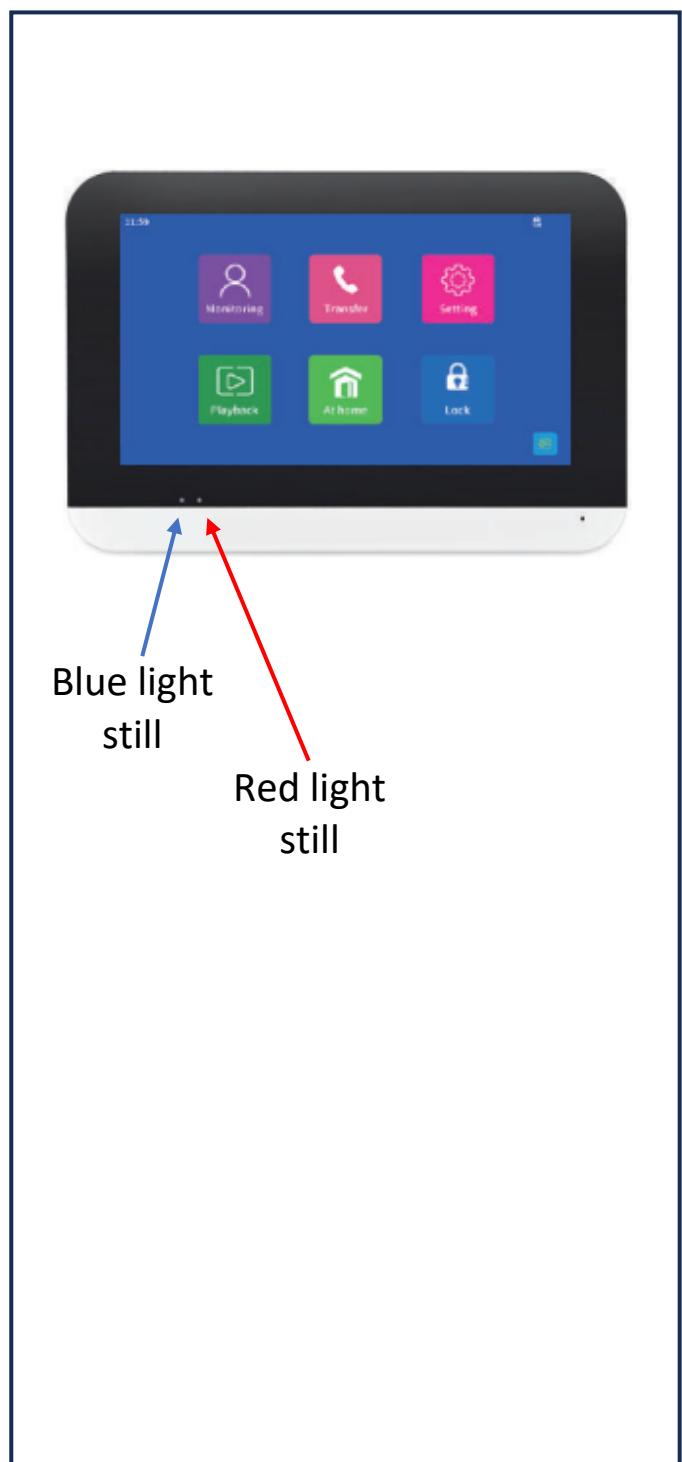

After successful pairing, blue light and red light becomes still.